



VK Cutting machine

Advertising Inkjet/ Wallpaper Industries Intelligent Processing Device








Feature

- 01 Left and right edge cutting, slitting, cutting off and other functions
- The combined color mark sensor is used to realize the secondary positioning detection of the photo manu–script.
- O3 Automatically correct and align the x and y directions.
- Can cut soft materials up to 1.5mm in thickness, including flyer, posters, sticker, wallpaper, floor graphic, window graphic, wall graphic, signs, posters, sticker, etc.

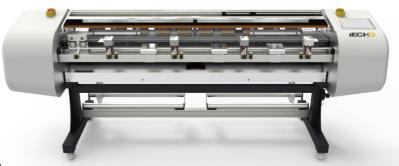



Parameters

| Model | VK | | |
|--|--|---|---|
| Cut type | Advertising, canvas, canvas bag and roll material less than 1.7mm | Correction | X,Y-correction |
| Feeding speed | 22m/min | Cutting speed (x-direction cutting speed) | Max 1.5m/s |
| Blade self-sharpening | Rolling Tool | Dimensions(W*H*L) | 2930mm *800mm *1180mm |
| Blade (Standard) | 4pcs | Max. Blade (Customized) | 10pcs |
| Max cutting width | 1700mm | Min cutting width | 110mm |
| Power | 220V/50HZ | Max cutting thickness | 1.5mm |
| Power (combined by motor and power supply below) | 1.2KW | Operating Enviroment | Temperature: 0°-40°; Humidity: 20%-80%RH |





Wechat

Website



